



Office de la Propriété  
Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2382790 A1 2003/08/01

(21) **2 382 790**

(12) **DEMANDE DE BREVET CANADIEN  
CANADIAN PATENT APPLICATION**

(13) **A1**

(22) Date de dépôt/Filing Date: 2002/04/22

(41) Mise à la disp. pub./Open to Public Insp.: 2003/08/01

(30) Priorité/Priority: 2002/02/01 (10/062,302) US


(51) Cl.Int.<sup>7</sup>/Int.Cl.<sup>7</sup> E05D 15/22, E05F 5/00, E05D 13/00

(71) Demandeur/Applicant:  
ASHLAND PRODUCTS, INC., US

(72) Inventeurs/Inventors:  
ANNES, JASON, US;  
SOLES, RALPH, US

(74) Agent: BLAKE, CASSELS & GRAYDON LLP

(54) Titre : SEMELLE DE FREIN COMPRENANT UN ELEMENT DE RESSORT DE FREIN  
(54) Title: BRAKE SHOE WITH SPRING BRAKE MEMBER

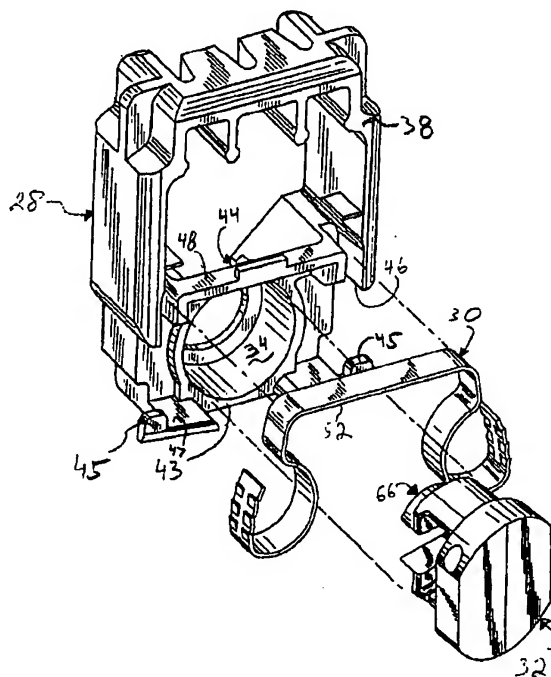

(57) Abrégé/Abstract:

A brake assembly (24) is provided for locking a slidable sash window (14) within a track (16) of a frame (12). The track (16) has a pair of spaced apart, opposed sidewalls (20), the brake assembly (24) includes a slider body (28) adapted for slidable motion within the track (16). The slider body (28) has a central opening (34) extending from a front face (36) to a rear face (38) and has a side opening (46) adjacent to the central opening (34). The assembly also includes a brake member (30) comprising a spring having a braking surface (58), and mounted within the slider body (28) such that the braking surface (58) is adapted for reciprocal lateral movement through the side opening (46). The assembly (24) further includes a cam (32) positioned in the central opening (34), wherein the slider body (28) receives and retains the brake member (30) and the cam (32) is rotatable in the central opening (34) for laterally biasing the braking surface (58) for movement through the side opening (46) wherein the braking surface (58) is adapted to frictionally engage one of the opposed side walls (20).

**ABSTRACT OF THE DISCLOSURE**

A brake assembly (24) is provided for locking a slidable sash window (14) within a track (16) of a frame (12). The track (16) has a pair of spaced apart, opposed sidewalls (20), the brake assembly (24) includes a slider body (28) adapted for  
5 slidable motion within the track (16). The slider body (28) has a central opening (34) extending from a front face (36) to a rear face (38) and has a side opening (46) adjacent to the central opening (34). The assembly also includes a brake member (30) comprising a spring having a braking surface (58), and mounted within the slider  
10 body (28) such that the braking surface (58) is adapted for reciprocal lateral movement through the side opening (46). The assembly (24) further includes a cam (32) positioned in the central opening (34), wherein the slider body (28) receives and retains the brake member (30) and the cam (32) is rotatable in the central opening (34) for laterally biasing the braking surface (58) for movement through the side opening  
15 (46) wherein the braking surface (58) is adapted to frictionally engage one of the opposed side walls (20).

**BRAKE SHOE WITH SPRING BRAKE MEMBER****DESCRIPTION****Technical Field**

This invention relates to a pivoting and sliding device for slidable door or window assemblies mounted in a frame. More particularly, it relates to a brake shoe having a cam activated spring locking mechanism that is activated when pivoting a  
5 slidable door or window out of the plane of the frame.

**Background of the Invention**

It is known in the prior art of slidable window sash and frame construction to have vertical and horizontal sliding windows adapted to be pivoted out of the frame when desired. For tasks such as cleaning the window from within the building in which  
10 the window is installed, a pivoting window must be securely arrested from sliding at the pivot point to prevent balance assemblies associated with the window assembly from propelling the sash upwards. This can damage the sash and cause injury to the user.

Pivot mechanisms have included movable pins mounted on the edge of the sash which may be extended outwardly to engage holes in the frame about which the sash  
15 may be pivoted. U.S. Patent No. 4,222,201 discloses a pivoting mechanism wherein a pair of spring biased pins are manually extended outward. Mating apertures in the tracks receive the pins, providing an axis of rotation. The sash may then be pivoted. After the window is pivoted back into the plane of the frame, the pins are retracted and secured in place by a screw to allow the sash to freely slide within the frame.

20 U.S. Patent No. 5,058,321 discloses a mechanism wherein spring biased pivot pins are freed for selective extension into apertures formed in a frame by rotating said pins. The pins are retracted by rotation and secured in place by an arrangement of detents.

It is also known in the prior art to provide a pivoting arrangement which  
25 achieves automatic arresting of the sliding motion of a slider body in a track in response to the commencement of the pivoting of the window sash. U.S. Patent No. 4,610,108 discloses such a device which incorporates a U-shaped spring member within a block

member, wherein a pin extends from a window sash. A cam member is incorporated in the block and receives the pivot pin extending from the window sash. The cam member is rotatably engagable with the U-shaped spring member to lock the block in position upon pivoting the window sash. The cam member cams the U-shaped spring member wherein the outwardly opposed serrated tips are forced outwardly through slots in the block for penetration into the track wall by the serrated tips. Although simple to operate, experience has shown that a pivot arrangement of this type may not develop adequate arresting force. In addition, the serrated tips being engagable with and normal to the track wall, can become jammed in the wall after the window sash is returned to its slidable position. This configuration can also damage certain track constructions.

The present invention is provided to solve these and other problems.

#### Summary of the Invention

According to one aspect of the invention, a sash balance brake assembly is disclosed for locking a slidable sash window or door within a track of a frame, the track having a pair of spaced apart, opposed sidewalls. The assembly has a slider body adapted for slidable motion within the track. The slider body has a central opening extending from a front face to a rear face and a pair of side openings. The assembly also has a brake member comprised of a spring having two braking surfaces, the brake member being mounted within the slider body such that one braking surface each is adapted for reciprocal lateral movement through a respective side opening. The assembly further has a cam positioned in the central opening. The slider body is adapted to receive and retain the brake member and the cam is adapted to be rotatable in the central opening for laterally biasing the braking surfaces for movement through the side openings for frictional engagement of each braking surface with a respective side wall.

According to another aspect of the invention, the spring has two end portions, each having a first segment and a second segment. The first segment curves inwardly and the second segment curves outwardly, wherein the braking surfaces are each located on a respective convex surface of the second segment.

According to another aspect of the invention, the braking surfaces are serrated.

According to another aspect of the invention, the slider body has a plurality of retaining tabs for holding the brake member within the slider body.

5 According to another aspect of the invention, the cam has a nipple adapted for maintaining the cam within the slider body.

According to another aspect of the invention, the brake member is comprised of a pair of brake pads connected by a resiliently flexible member. The brake member is mounted within the slider body such that one brake pad each is adapted for reciprocal lateral movement through a respective side opening. The assembly further has a cam positioned in the central opening. The slider body is adapted to receive and retain the brake member and the cam is adapted to be rotatable in the central opening for laterally biasing the brake pads for movement through the side openings for frictional engagement of each brake pad with a respective side wall.

15 Other features and advantages of the invention will be apparent from the remainder of this specification.

#### Brief Description of the Drawings

The pivoting and sliding device of the invention will now be described with reference to the accompanying drawings, in which:

20 FIG. 1 is a perspective view of a double hung window assembly with the present invention shown in phantom;

FIG. 2 is an exploded rear perspective view of a brake shoe assembly having a spring brake member of the present invention;

25 FIG. 3 is a rear perspective view of the brake shoe assembly with the spring brake member of the present invention;

FIG. 4 is a front elevation of the assembly of FIG. 3 with the brake member in its retracted or slidable position;

FIG. 5 is a front elevation of the assembly of FIG. 3 with the brake member in its extended position or braking position;

FIG. 6 is a rear elevation of the assembly of FIG. 3 with the brake member in its retracted or slidable position;

5 FIG. 7 is a rear elevation of the assembly of FIG. 3 with the brake member in its extended position or braking position;

FIG. 8 is a rear perspective view of a slider body of the assembly of FIG. 2;

FIG. 9 is a rear elevation of the slider body of the assembly of FIG. 3;

10 FIG. 10 is a front perspective of the slider body of the assembly of FIG. 3;

FIG. 11 is a rear perspective of a cam of the assembly of FIG. 3;

FIG. 12 is a front perspective of the cam of the assembly of FIG. 3;

FIG. 13 is an elevation of the spring brake member of the assembly of FIG. 3;

15 FIG. 14 is a perspective view of the spring brake member of the assembly of FIG. 3;

FIG. 15 is a cross section of the brake shoe assembly of the present invention slidably mounted within a track of a window frame and its spring brake member in its retracted or slidable position;

20 FIG. 16 is a cross section of the brake shoe assembly of the present invention slidably mounted within a track of a window frame and its spring brake member in its retracted or slidable position;

FIG. 17 is a rear elevation of an additional embodiment of the brake shoe with spring brake member assembly of the present invention;

25 FIG. 18 is a front perspective view an additional embodiment of a cam of the present invention;

FIG. 19 is a rear perspective view of the cam of FIG. 18; and

FIG. 20 is a rear elevation view of the cam of FIG. 18.

### Detailed Description

While this invention is susceptible of embodiment in many different forms, there is shown in the drawings and will herein be described in detail preferred embodiments of the invention with the understanding that the present disclosure is to be considered as an exemplification of the principles of the invention and is not intended to limit the broad aspect of the invention to the embodiments illustrated.

Referring to FIG. 1, there is shown a double hung window assembly 10 which includes a window frame 12 and a pair of window sashes 14.

The window frame 12 includes a pair of generally parallel tracks 16, cross sections of which can be seen in FIGS. 15 and 16. The track 16 includes a base 18 and a pair of side walls 20 extending generally parallel from the base 18. Also included is a shoulder 22 extending from each sidewall 20 towards the other sidewall and generally parallel with the base 18.

The sash 14, as shown in FIG. 1 is transversely disposed between the tracks 16 for slidable movement in the plane defined by the tracks 16. Located at the lower end of parallel transverse sides of sash 14 is a pair of sash balance/brake shoe assemblies 21. The sash balance/brake shoe assemblies 21 provide a generally upward bias on transverse sides of the sash 14. The sash balance/brake shoe assembly 21 generally includes a balance member 23 connected to a brake shoe assembly 24. The balance member 23 can come in different forms known in the art such as, for example, block and tackle balance, curl springs, spiral springs and the like. A pivot pin 26 (shown also in FIGS. 15-16) extends from the lower end of each transverse side of the sash 14 and is operably received by the brake shoe assemblies 24.

Referring to FIGS. 2-7, the brake shoe assembly 24 is adapted for slidable mounting in the track 16 and generally includes a slider body 28, a brake member 30 and a cam 32.

As shown in FIGS. 15-16, the slider body 28 has dimensions to fit within the track 16 as described above. Referring to FIGS. 8-10, the slider body 28 preferably is

manufactured from a tough material such as nylon, although other suitable materials can be used. The slider body 28 includes a central opening 34 located near a lower end 35 of the slider body 28. The central opening 34 extends from a front face 36 to a rear face 38. An upper end 37 of the slider body 28 is adapted for connection to the various types of balance members 23 discussed above.

The central opening 34 is defined by a generally cylindrical wall 40 having a front end 42 and a rear end 43. The cylindrical wall 40 has a slot 44 adapted to assist in receiving and retaining the cam 32, to be more fully described below.

As further shown in FIGS. 8-10, the slider body 28 has a pair of lateral or side openings 46 in proximity to the central opening 34. The openings 46 are adapted to receive the brake member 30 as shown in FIGS. 2-3. The slider body 28 also has a lateral cross member 48 with a retaining tab 49 formed centrally thereon. The slider body 28 has a bottom wall 47. The bottom wall 47 has retaining tabs 45 on each end thereof to assist in retaining the brake member 30 within the slider body 28.

As shown in FIGS. 13-14, the brake member 30 is a spring formed from a single flat piece of steel having two end portions 50. The brake member 30 has resiliently flexible characteristics. However, it is noted that the brake member 30 may be formed from any material or combination having similar resiliently flexible characteristics or from a plurality of contiguous pieces of steel or other such material. The brake member 30 has a base portion 52 that is straight having two end portions 50. In one embodiment, the base portion 52 has rounded or curved portions 61 leading into each end portion 50. Each end portion 50 is gibbous-like and generally has an inverted S-shape. Each end portion 50 has a first segment 51 and a second segment 53. The first segment 51 curves inwardly and has a convex surface 54. The second segment 53 curves outwardly and has a convex surface which forms a braking surface 58. The outer portions 50 also each have a tip 56 at distal ends of the brake member 30. As shown in the drawings, the tips 56 curl roughly inward to point generally towards the base portion 52 of brake member 30.



Each end portion 50 of the brake member 30 has generally a gibbous-like shape. As can be seen in FIG. 13, there remains an open space 57 between each tip 56 and the brake member 30. The open space 57 permits improved performance of the brake member 30 as it allows for increased resilient flexibility of each end portion 50 of the brake member 30.

As depicted, each braking surface 58 includes a series of serrations 59. In one preferred embodiment, the brake surface 58 has a configuration of three pairs of serrations 59, as shown in FIG 14. Each serration 59 extends away from the braking surface 58 at an oblique angle and towards the direction in which any counterbalance force is supplied by the balance member 23. Each serration 50 also has a sharply defined edge 55 for effective braking characteristics. However, other arrangements and configurations may be suitable. For example, other preferred embodiments may include serrations 59 with circular, rectangular, or triangular cross sections or any combination thereof. Additional preferred embodiments may include frictional protrusions, protuberances or grooves, rather than the serrations 59 depicted.

The rotatable cam 32 (FIG. 11&12) is formed from a similar material as that of the slider body 28 and includes a generally cylindrical body 29, although other geometries may be utilized. However, other materials such as metal may also be used. A first enlarged end 64 of the cam 32 has a pair of diametric curved or arcuate surfaces 60 and a pair of planar surfaces or flats 62 located on a peripheral surface 63. As shown in FIG. 12, integrally formed on a second end 66 of the cam 32 is a pair of nipples 68. The nipples 68 are located in close proximity to one another. The cam 32 is adapted to operably receive the pivot pin 26 (FIGS. 15-16). As shown, an axial slot 70 is formed through the second end 66 and terminates at the first enlarged end 64.

As can best be understood by reference to FIGS. 2-7, the brake member 30 is inserted into the slider body 28 from the direction of the rear face 38. When the brake member 30 is received by the slider body 28, the base portion 52 is in close abutment with the lateral cross member 48. Also, the end portions 50 are located in the side

openings 46. The retaining tabs 49 and 45 cooperate to hold the brake member 30 within the slider body 28.

Also from the direction of the rear face 38, the second end 66 of the cam 32 is inserted into the central opening 34 such that the nipples 68 may pass through the gap 44. Once the nipples 68 have passed beyond the front end 42, the cam 32 is rotated. This results in the nipples 68 cooperating with the front end 42 to limit axial movement of the cam 32 in the direction of the rear face 38. Axial movement of the cam 32 in the direction of the front face 36 is also limited. This is achieved through the close abutment of the rear end 43 of the cylindrical wall 40 and the first enlarged end 64 of the cam 32. Once the cam 32 is inserted in the slider body 28 as described, the first enlarged end 64 is immediately adjacent to the end portions 50.

When the slider body 28 is in a freely slidable position within the track 16 (FIGS. 4, 6 & 15), the planar surfaces 62 are in close abutment with a respective convex surface 54 of the brake member 30 and the braking surfaces 58 remain within the side openings 46. Rotation of the sash 14 out of the frame 12 results in corresponding rotation of the pivot pin 26. This in turn rotates the cam 32 causing the planer surfaces 62 and the arcuate surfaces 60 to cooperate to engage, or cam, the respective convex surface 54 of the first segment 51 of the spring 30. This engagement causes a lateral biasing of the braking surfaces 58 on the second segments 53 through the side openings 46. This causes serrations 59 of the braking surfaces 58 to frictionally engage respective side walls 20. This frictional engagement prevents slidable motion of the slider body 28 within the track 16 (FIGS. 5, 7 & 16). As can be seen, the serrations 59 of the braking surfaces 58 extend from the second segments 53 at an oblique angle generally in the direction of the upper end 37. This improves their ability to frictionally engage the side walls 20.

Upon rotation of the sash 14 back to its slidable position within the frame 14, the planar surfaces 62 of the cam 32 are brought into cooperation with the first segments 51. This allows the resilient flexibility of the brake member 30 to return the braking

surfaces 58 to a position within the side openings 46. This frictionally disengages the serrations 59 from the side walls 20, thereby returning the slider body 28 to a freely slidable position within the track 16.

An additional embodiment is shown in FIG. 17. In this second embodiment, the brake member 230 is formed by two brake pads 258, each having formed thereon a series of frictional grooves 259. The brake pads 258 are connected by a resiliently flexible member 260. The brake member 230 is received by the slider body 28 such that the flexibly resilient member 260 is in close abutment with the lateral cross member 48, the brake pads 258 are mounted within the side openings 46, and the retainer tabs 45, 49 retain and hold the brake member 230 within the slider body 28.

In operation, rotation of the cam 32 from a slidable position, similar to that of the first described embodiment, causes the arcuate surfaces 60 to cooperate with the brake pads 258. This cooperation results in lateral biasing of the brake pads 258 and frictional engagement of the frictional grooves 259 with the respective side walls 20. This frictional engagement slidably locks the slider body 28 within the track 16. Upon rotation of the cam 32 back to its slidable position, the planar surfaces 62 cooperate with the brake pads 258. This allows the resiliently flexible member 260 to return the brake pads 258 to a position within the side openings 46. This slidably releases the frictional grooves 259 from their respective side walls 20 to allow slidable movement of the slider body 28.

An additional embodiment of the cam is depicted in FIGS. 18-20 and is designated by the reference numeral 332. The cam 332 is adapted to fit in and function with the slider body 28 and brake member 30 in a manner generally identical to that of the above described cam 32. The cam 332 includes a generally cylindrical body 29. The cam 332 has a first enlarged end 64 that has a pair of opposed arcuate surfaces 60 and a pair of opposed concave surfaces 362. The concave surfaces 362 define a recess 364. Integrally formed on a second end 66 of the cam 332 is a pair of nipples 68. The nipples 68 are located in close proximity to one another. The cam 332 is adapted to receive the

pivot pin 26 (FIGS. 15-16). As shown, an axial slot 70 is formed through the second end 66 and terminates at the first enlarged end 64. An alternative preferred embodiment includes one concave surface 362. It is noted that those skilled in the art will recognize that the enlarged end 64 of the cam 32 or the cam 332 can be eliminated and that the camming surfaces do not need to be located at an end of the cam to practice the present invention.

The cam 332 is assembled into the brake shoe assembly 24 in the same manner as that described above with respect to the cam 32.

As can be understood when referring to FIGS. 10-14 and 18-20, when the cam 332 is assembled within the slider body 28 and in its slidable position, the concave surfaces 362 are in close abutment with a respective convex surface 54 of the brake member 30. In other words, the recesses 364 each receive, in confronting relation, a respective first segment 51 of the brake member 30. In this position, the braking surfaces 58 remain within the side openings 46. Rotation of the cam 332 in a manner similar to that described above, causes the concave surfaces 362 and the arcuate surfaces 60 to cooperate to engage, cam, or laterally bias the respective convex surface 54 of the first segment 51 of the spring 30. This engagement causes a lateral biasing of the braking surfaces 58 on the second segments 53 through the side openings 46. This causes serrations 59 of the braking surfaces 58 to frictionally engage respective side walls 20, as previously described.

Use of the concave surfaces 362 in place of the planer surfaces 62, results in a quicker lateral biasing of the braking surfaces 58 upon rotation of the cam 332. That is, the lateral biasing of the braking surfaces 58 occurs through a smaller degree of rotation of the cam 332 than can be achieved by the cam 32 that incorporates planer surfaces 62. This occurs because upon rotation of the cam 332, the arcuate surface 60 engages the first segment 51 of the brake member 30 to begin the camming action. Thus, braking of the brake assembly 24 within the track 16 is optimized.

While the specific embodiments and various details thereof have been illustrated and described, numerous modification come to mind without significantly departing from the spirit of the invention and the scope of protection is only limited by the following claims.

CLAIMS

WE CLAIM:

1. A brake assembly for locking a slidable sash window within a track of a frame, the track having a pair of spaced apart, opposed sidewalls, the assembly comprising:

a slider body adapted for slidable motion within the track, the slider body having a central opening extending from a front face to a rear face and having a side opening adjacent to the central opening;

a brake member comprising a spring having a braking surface, the brake member mounted within the slider body such that the braking surface is adapted for reciprocal lateral movement through the side opening;

a cam positioned in the central opening;

wherein the slider body receives and retains the brake member and the cam is rotatable in the central opening for laterally biasing the braking surface for movement through the side opening wherein the braking surface is adapted to frictionally engage one of the opposed side walls.

2. The brake assembly of claim 1 wherein the slider body further comprises a second side opening adjacent to the central opening and the brake member further comprises a second braking surface adapted for reciprocal lateral movement through the second side opening.

3. The brake assembly of claim 1 wherein the spring further comprises an end portion having a first segment and a second segment, the first segment curving inwardly and the second segment curving outwardly, wherein the braking surface is located on the second segment.

4. The brake assembly of claim 1 wherein the braking surface is serrated.

5. The brake assembly of claim 1 wherein the braking surface has a plurality of serrations.

6. The brake assembly of claim 5 wherein the plurality of serrations comprises a pair of serrations.

7. The brake assembly of claim 5 wherein the plurality of serrations comprises three pair of serrations.

5 8. The brake assembly of claim 1 wherein the braking surface has a frictional protuberance.

9. The brake assembly of claim 1 wherein the slider body has a retaining tab adapted for holding the brake member within the slider body.

10 10. The brake assembly of claim 1 wherein the slider body has a lateral cross member and the spring has a base portion in close abutment with the lateral cross member.

11. The brake assembly of claim 1 further comprising a retaining tab on the lateral cross member for retaining the brake member in the slider body.

15 12. The brake assembly of claim 1 wherein the slider body has a plurality of retaining tabs for holding the brake member within the slider body.

13. The brake assembly of claim 1 wherein the cam has a nipple adapted to engage an end surface of the central opening for maintaining the cam within the slider body.

20 14. The brake assembly of claim 1 wherein the cam has an arcuate surface and a flat surface, the cam being adapted for cooperation between the arcuate surface and the flat with the brake member for said movement of the braking surface through the side openings.

25 15. The brake assembly of claim 14 wherein the cam is further adapted for cooperation between its arcuate surface and the spring for said movement of the braking surface through the side opening.

16. A brake assembly for locking a slidable sash window within a track of a frame, the track having a pair of spaced apart, opposed sidewalls, the assembly comprising:

a slider body adapted for slidable motion within the track, the slider body having a central opening extending from a front face to a rear face and having a side opening adjacent to the central opening;

5 a brake member comprising a spring having an end portion having a first segment and a second segment, the first segment curving inwardly and the second segment curving outwardly and having a braking surface thereon, the brake member mounted within the slider body such that the end portion is adapted for reciprocal lateral movement through the side opening;

a cam positioned in the central opening;

10 wherein the slider body is adapted to receive the brake member and the cam is adapted to be rotatable in the central opening for laterally biasing the end portion for movement through the side opening wherein the braking surface is adapted to frictionally engage one of the opposed side walls.

15 17. The brake assembly of claim 16 wherein the slider body further comprises a second side opening adjacent to the central opening and the brake member further comprises a second end portion, the second end portion also having a first segment and a second segment, the first segment curving inwardly and the second segment curving outwardly, a second braking surface located on the second segment of the second end portion, wherein the cam is adapted for laterally biasing the second end  
20 portion for movement through the side opening for frictional engagement of the second braking surface with the opposed side walls.

18. The brake assembly of claim 17 wherein the braking surface is serrated.

25 19. The brake assembly of claim 17 wherein the braking surface has a plurality of serrations.

20. The brake assembly of claim 19 wherein the plurality of serrations comprises a pair of serrations.



21. The brake assembly of claim 19 wherein the plurality of serrations comprises three pair of serrations.

22. The brake assembly of claim 16 wherein the braking surface has a frictional protuberance.

5 23. The brake assembly of claim 16 wherein the slider body has a retaining tab adapted for holding the brake member within the slider body.

24. The brake assembly of claim 16 wherein the slider body has a plurality of retaining tabs adapted for holding the brake member within the slider body.

10 25. The brake assembly of claim 16 wherein the cam has a nipple adapted to engage an end surface of the central opening for maintaining the cam within the slider body.

15 26. The brake assembly of claim 16 wherein the cam has an arcuate surface and a flat, the cam being adapted for cooperation between the arcuate surface and the flat with the end portion for said movement of the braking surface through the side opening.

27. A brake assembly for locking a slidable sash window within a track of a frame, the track having a pair of spaced apart, opposed sidewalls, the assembly comprising:

20 a slider body adapted for slidable motion within the track, the slider body having a central opening extending from a front face to a rear face and having a pair of side openings adjacent to the central opening;

a brake member comprising a spring having a pair of braking surfaces, the brake member mounted within the slider body such that each braking surface is adapted for reciprocal lateral movement through a respective side opening;

25 a cam positioned in the central opening;

wherein the slider body receives and retains the brake member and the cam is rotatable in the central opening wherein the braking surfaces are adapted to frictionally engage respective opposed side walls.

28. A brake assembly for locking a slidable sash window within a track of a frame, the track having a pair of spaced apart, opposed sidewalls, the assembly comprising:

5 a slider body adapted for slidable motion within the track, the slider body having a central opening extending from a front face to a rear face, having a pair of side openings adjacent to the central opening;

10 a brake member comprising a spring having a base portion and two end portions, each end portion having a first segment curving inwardly and a second segment curving outwardly and having a convex outer surface, each end portion having a braking surface located on the second segment with each braking surface having a plurality of serrations thereon extending from the second segment, the brake member mounted within the slider body such that one of the respective braking surfaces is adapted for reciprocal lateral movement through a respective side opening;

a cam positioned in the central opening;

15 wherein the slider body receives and retains the brake member and the cam is rotatable in the central opening for laterally biasing the braking surfaces for movement through respective side openings wherein the braking surfaces are adapted to frictionally engage respective opposed side walls.

20 29. A brake assembly for locking a slidable sash window within a track of a frame, the track having a pair of spaced apart, opposed sidewalls, the assembly comprising:

a slider body adapted for slidable motion within the track, the slider body having a central opening extending from a front face to a rear face and having a pair of side openings adjacent to the central opening;

25 a brake member comprising a pair of brake pads connected by a flexibly resilient member, the brake member mounted within the slider body such that one brake pad each is adapted for reciprocal lateral movement through a respective side opening,

the brake member mounted within the slider body such that one of the respective braking surfaces is adapted for reciprocal lateral movement through a respective side opening;

a cam positioned in the central opening;

5 wherein the slider body receives and retains the brake member and the cam is rotatable in the central opening for laterally biasing the brake pads for movement through respective side openings wherein the brake pads are adapted to frictionally engage respective opposed side walls.

30. The brake assembly of claim 29 further comprising:

10 a frictional groove located on each brake pad for said frictional engagement with respective opposed side walls.

31. A brake member for a brake assembly having a slider body with a pair of side openings for locking a slidable sash window within a track of a frame, the brake member comprising:

15 a spring having a base portion and two end portions, each end portion having a first segment curving inwardly and a second segment curving outwardly and having a convex outer surface, each end portion having a braking surface located on the second segment with each braking surface having a plurality of serrations thereon extending from the second segment;

20 wherein the brake member is adapted to be mounted within the slider body such that one of the respective braking surfaces is adapted for reciprocal lateral movement through a respective side opening.

32. A brake assembly for locking a slidable sash window within a track of a frame, the track having a pair of spaced apart, opposed sidewalls, the assembly comprising:

25 a slider body adapted for slidable motion within the track, the slider body having a central opening extending from a front face to a rear face and having a side opening adjacent to the central opening;

a brake member comprising a spring having an end portion having a first segment curving inwardly and a second segment having a braking surface, the brake member mounted within the slider body such that the braking surface is adapted for reciprocal lateral movement through the side opening;

5 a cam positioned in the central opening, the cam having a concave surface receiving the first segment;

wherein cam is rotatable in the central opening to engage the first segment for laterally biasing the braking surface for movement through the side opening, wherein the braking surface is adapted to frictionally engage one of the opposed side walls.

10 33. The brake assembly of claim 32 further comprising:

a second side opening adjacent to the central opening of the slider body;

a second end portion of the brake member having a first segment curving inwardly and a second segment having a braking surface; and

15 a second concave surface of the cam receiving the first segment of the second end portion of the brake member;

wherein the cam is rotatable in the central opening to engage the first segment of the second end portion of the brake member for laterally biasing the braking surface of the second end portion of the brake member through the second side opening.

20 34. A cam for a brake assembly for locking a slidable sash window within a track of a frame, the assembly including a slider body with a central opening for rotatably supporting the cam, a brake member associated with the slider body and further including a pivot pin, the cam comprising:

25 a generally cylindrical body having an axial slot adapted to receive the pivot pin, the body having a portion having an outer peripheral surface with an arcuate surface and a concave surface;

wherein the cam is adapted to be mounted within the central opening and wherein the concave surface is adapted to receive a portion of the brake member.

35. A cam for a brake assembly for locking a slidable sash window within a track of a frame, the assembly including a slider body with a central opening for rotatably supporting the cam, a brake member associated with the slider body and further including a pivot pin, the cam comprising:

5 a generally cylindrical body having an axial slot adapted to receive the pivot pin, the body having a portion having an outer peripheral surface with a pair of opposed arcuate surfaces and a pair of opposed concave surfaces;

10 wherein the cam is adapted to be mounted within the central opening and wherein the concave surfaces are each adapted to receive a respective portion of the brake member.

FIG. 1

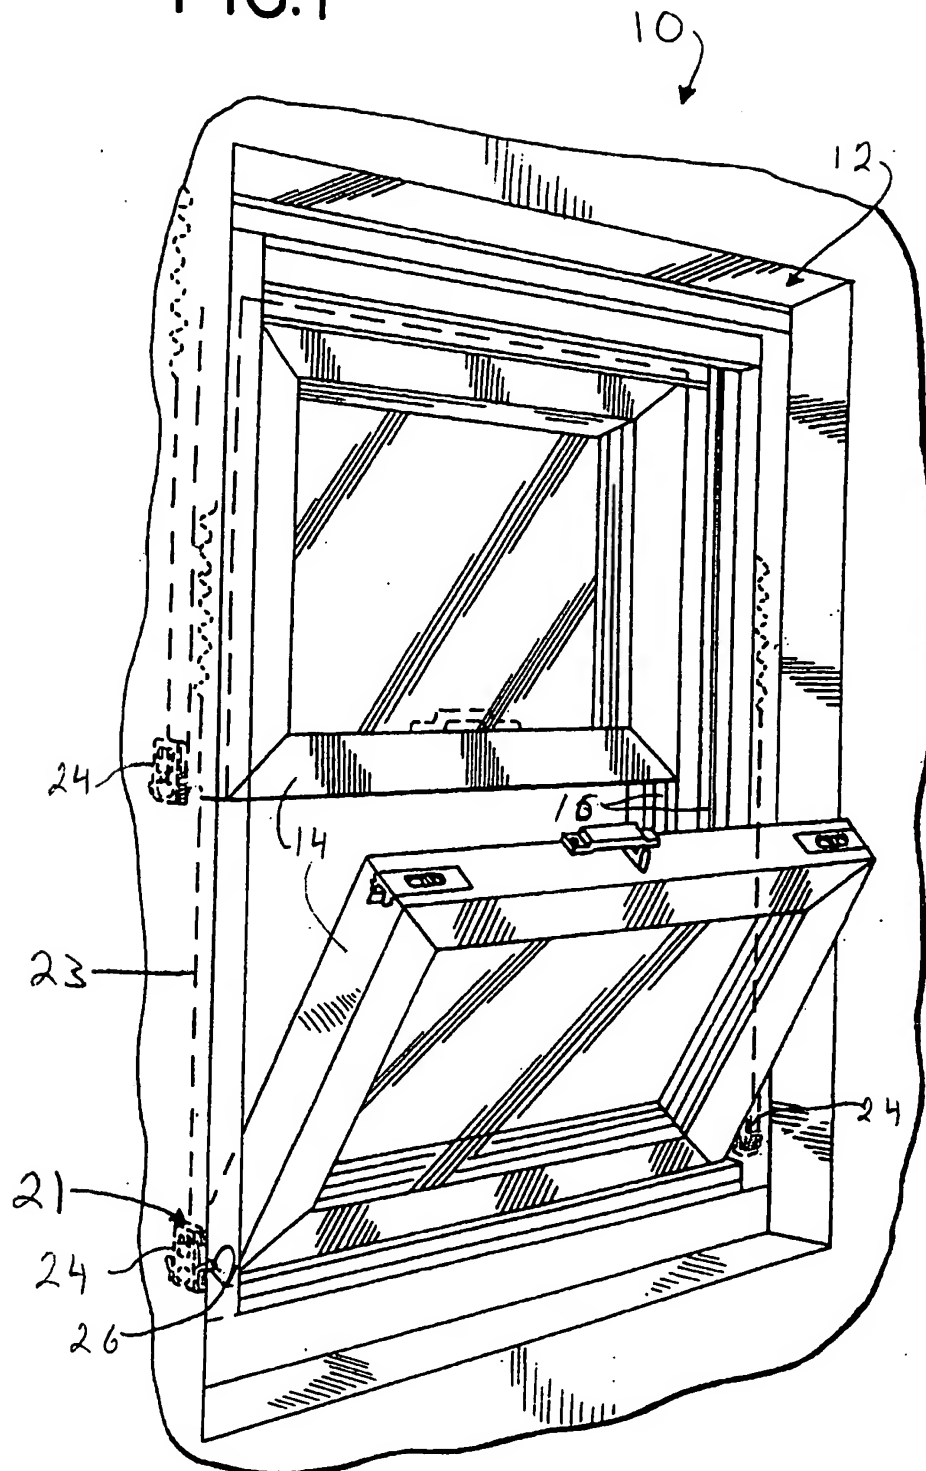


FIG.3

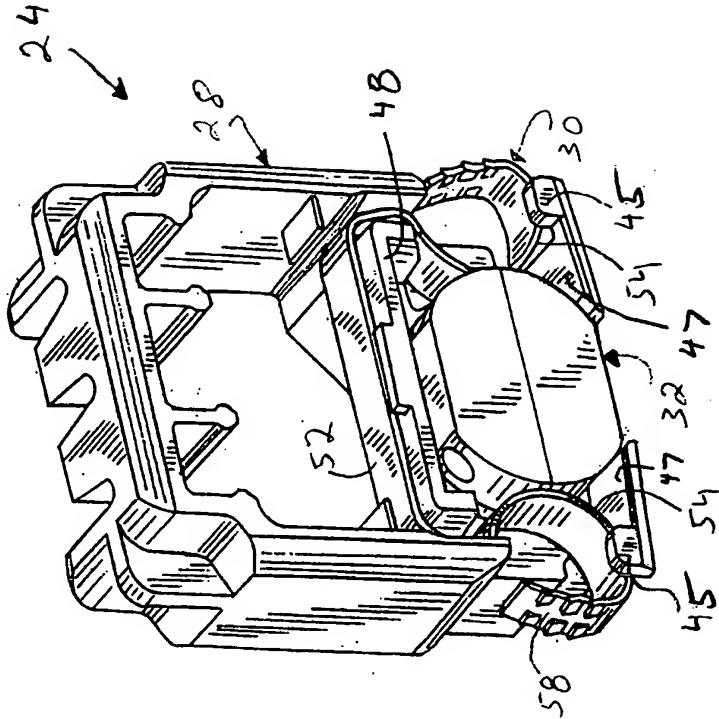


FIG.2

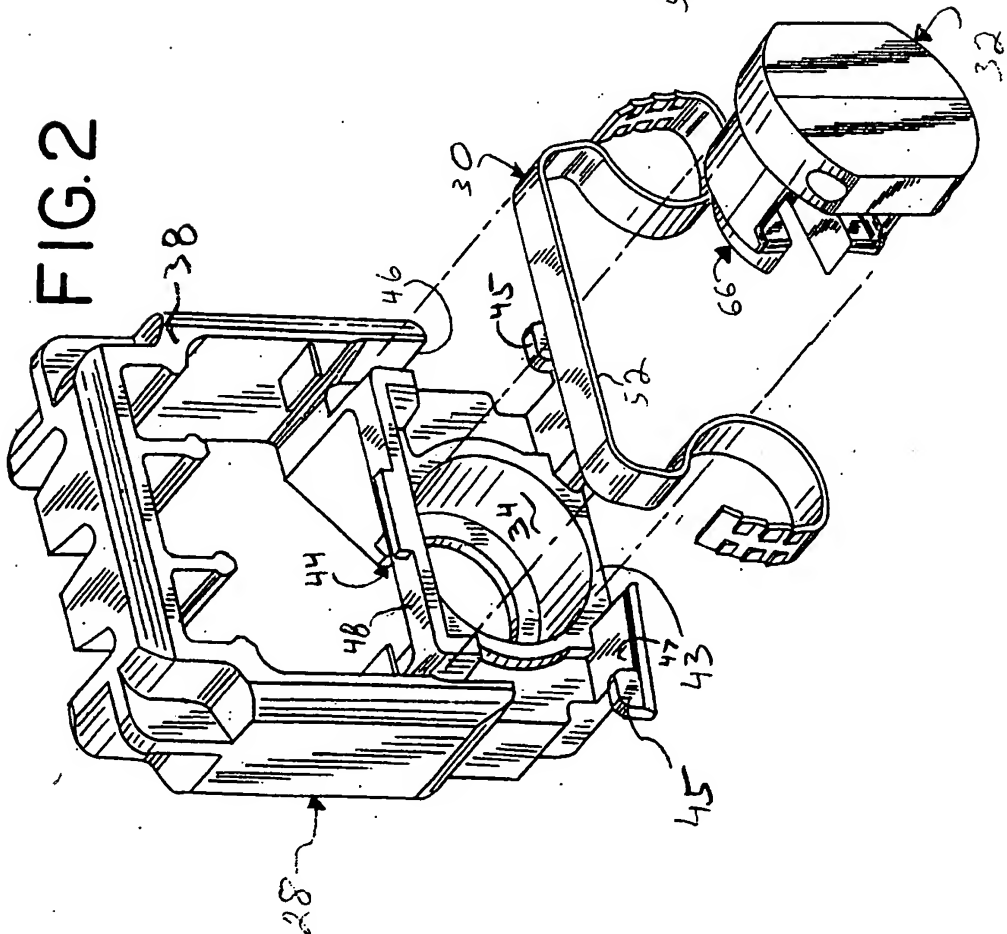


FIG. 4

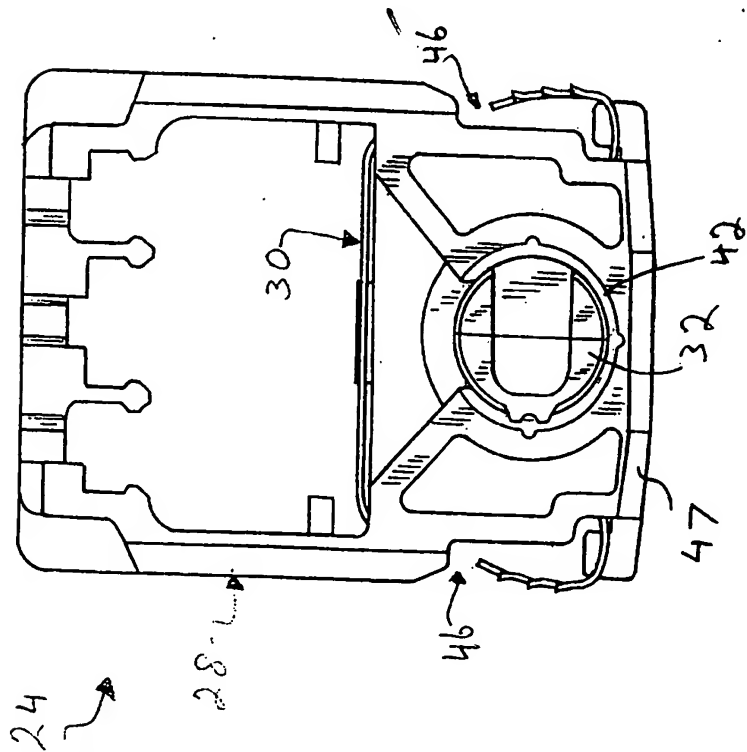
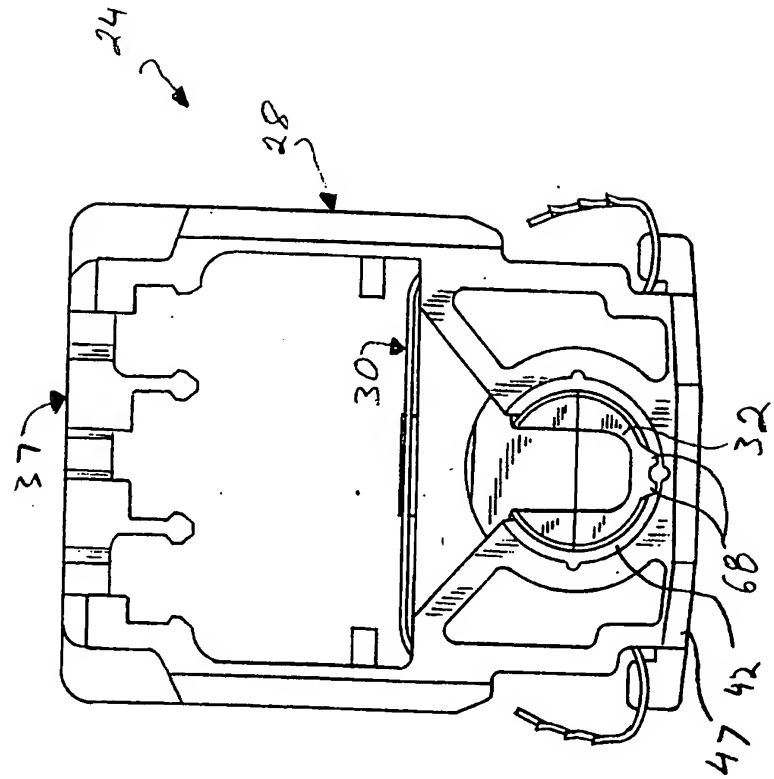
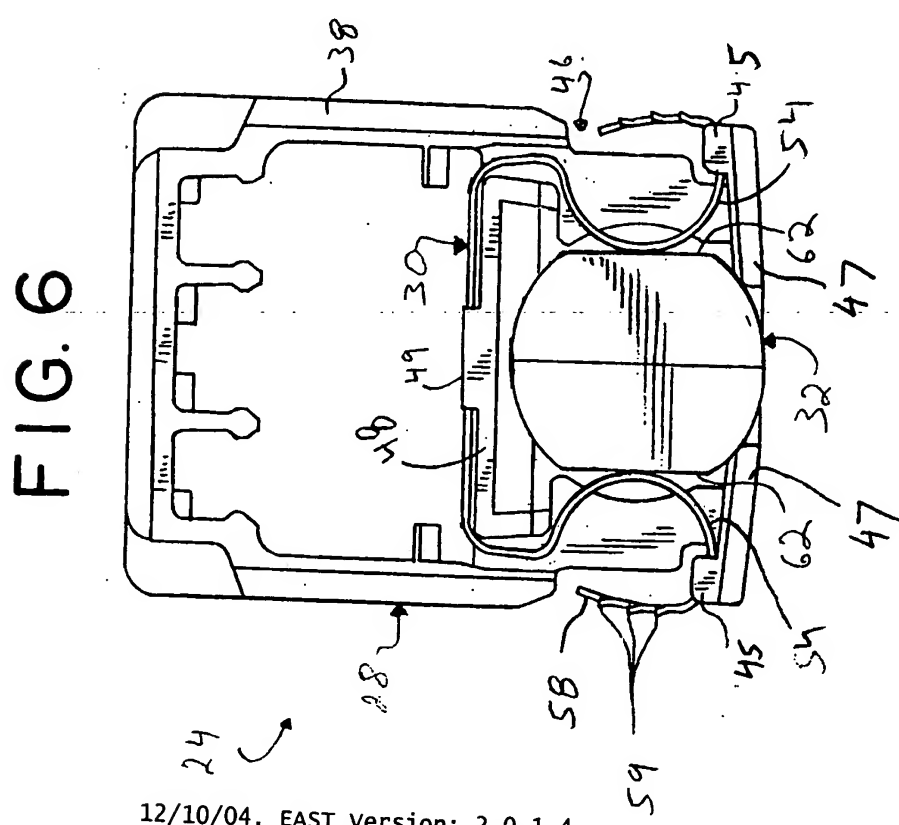
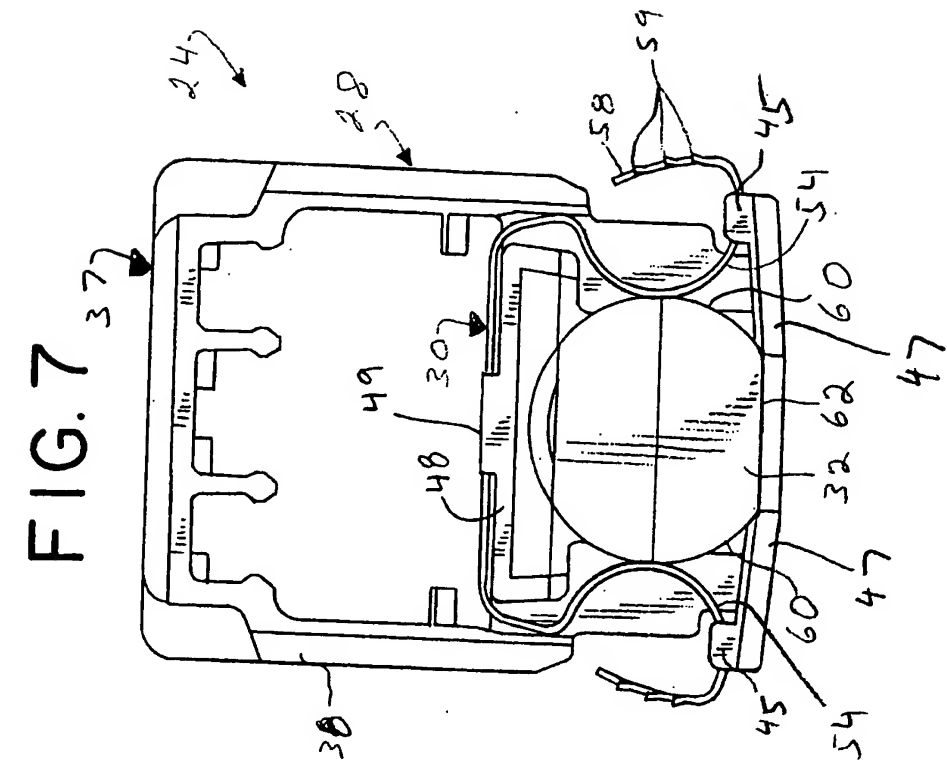
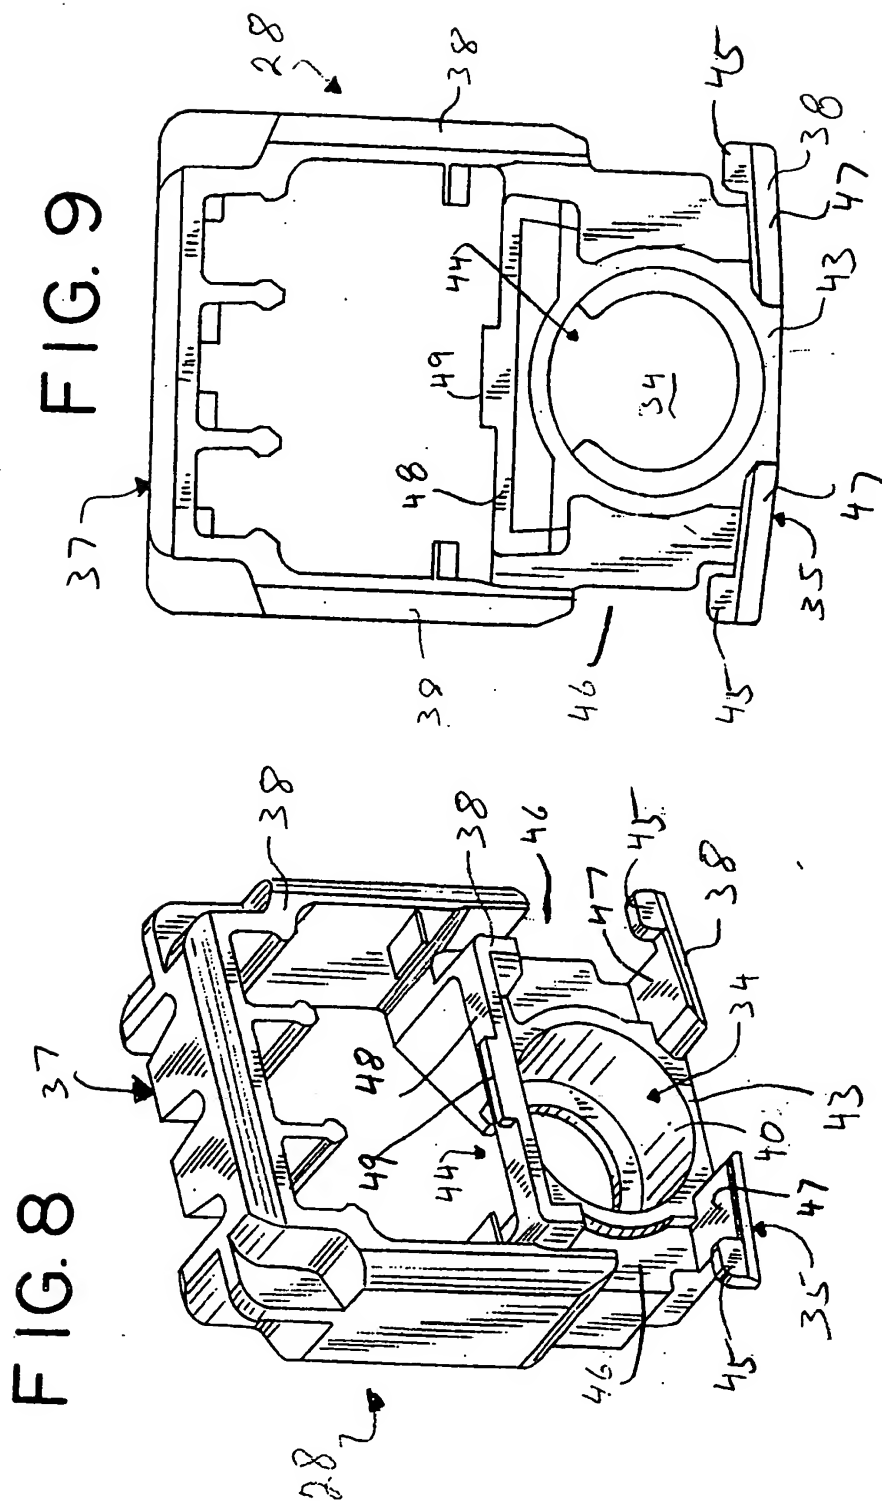


FIG. 5









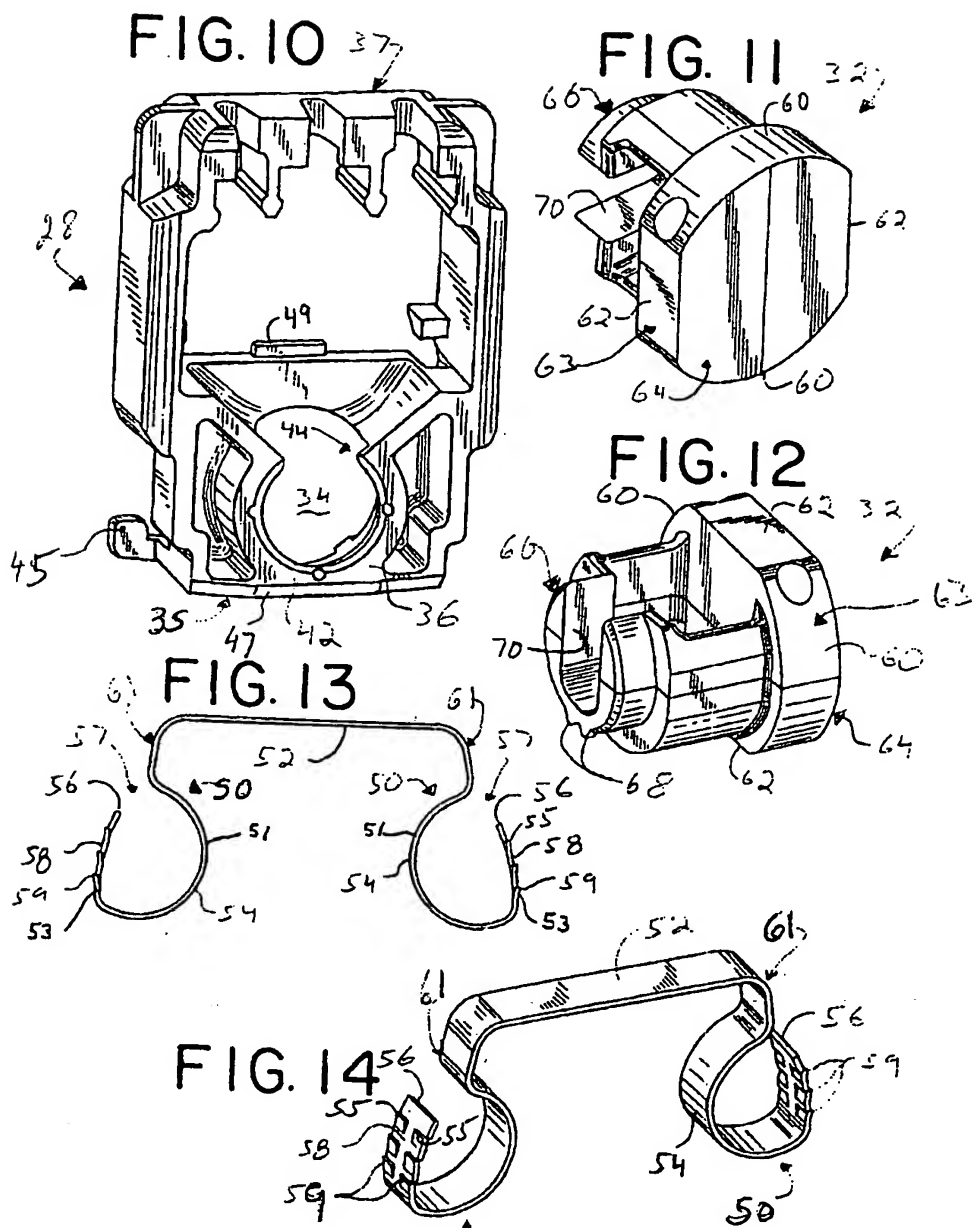


FIG. 15

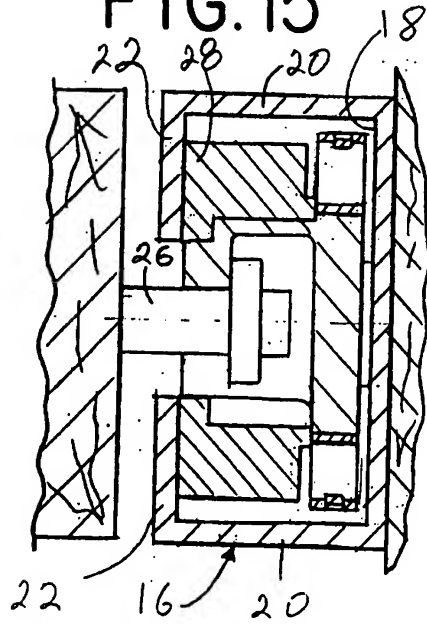


FIG. 16





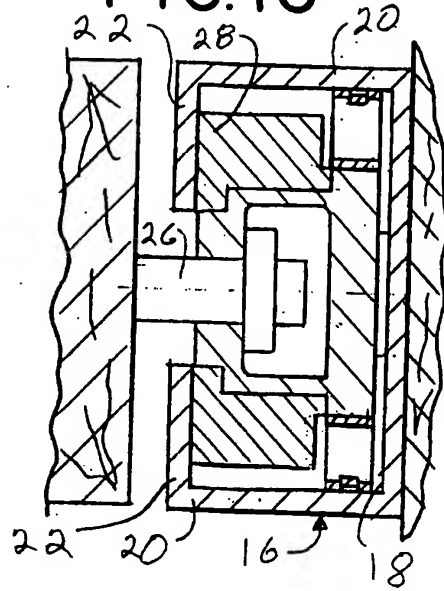


FIG. 17

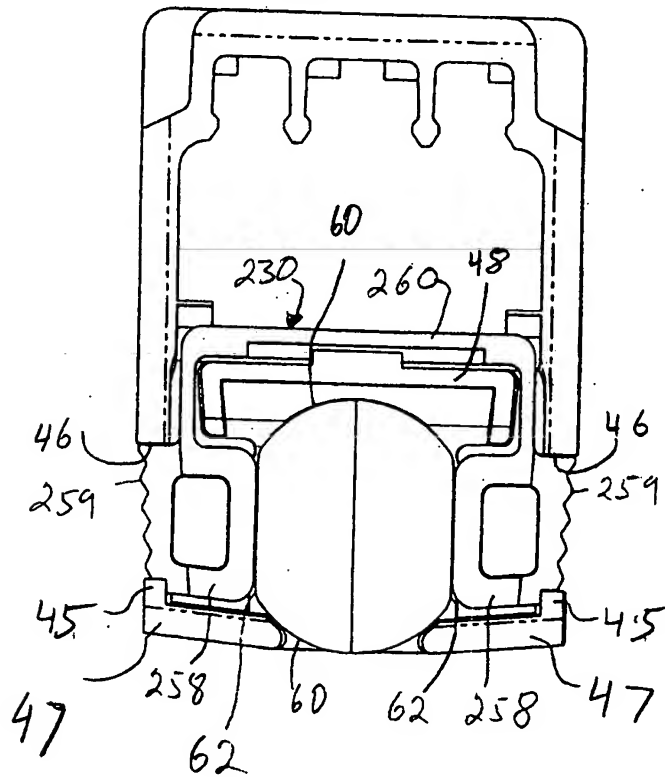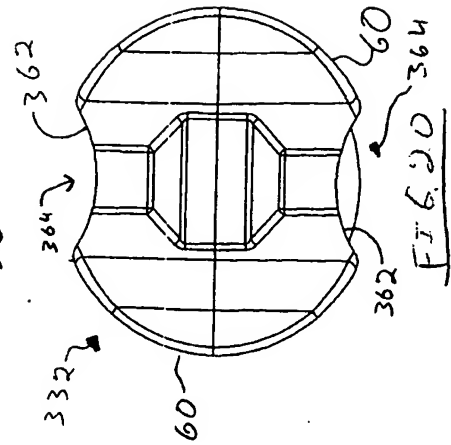

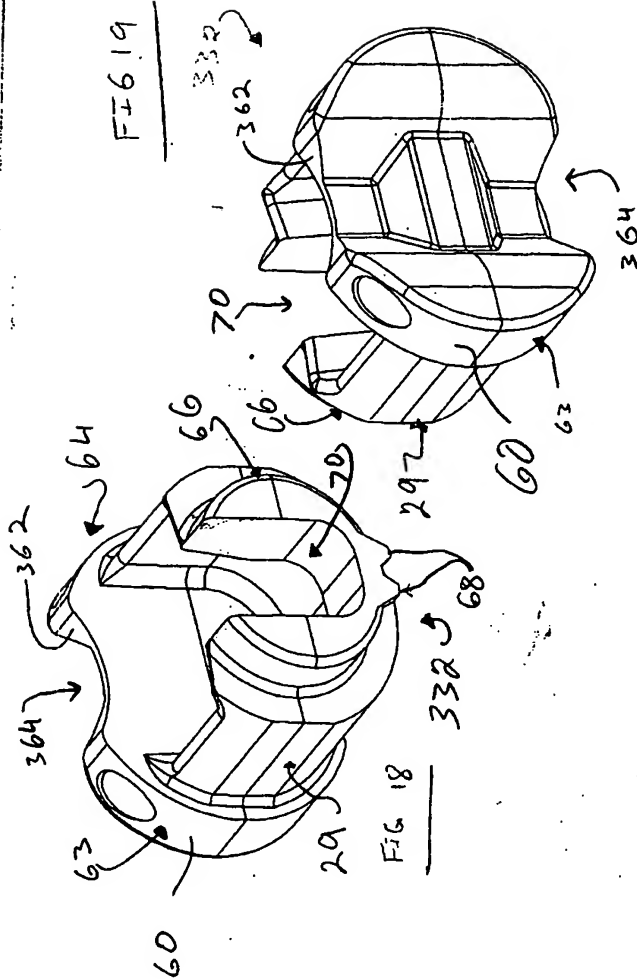

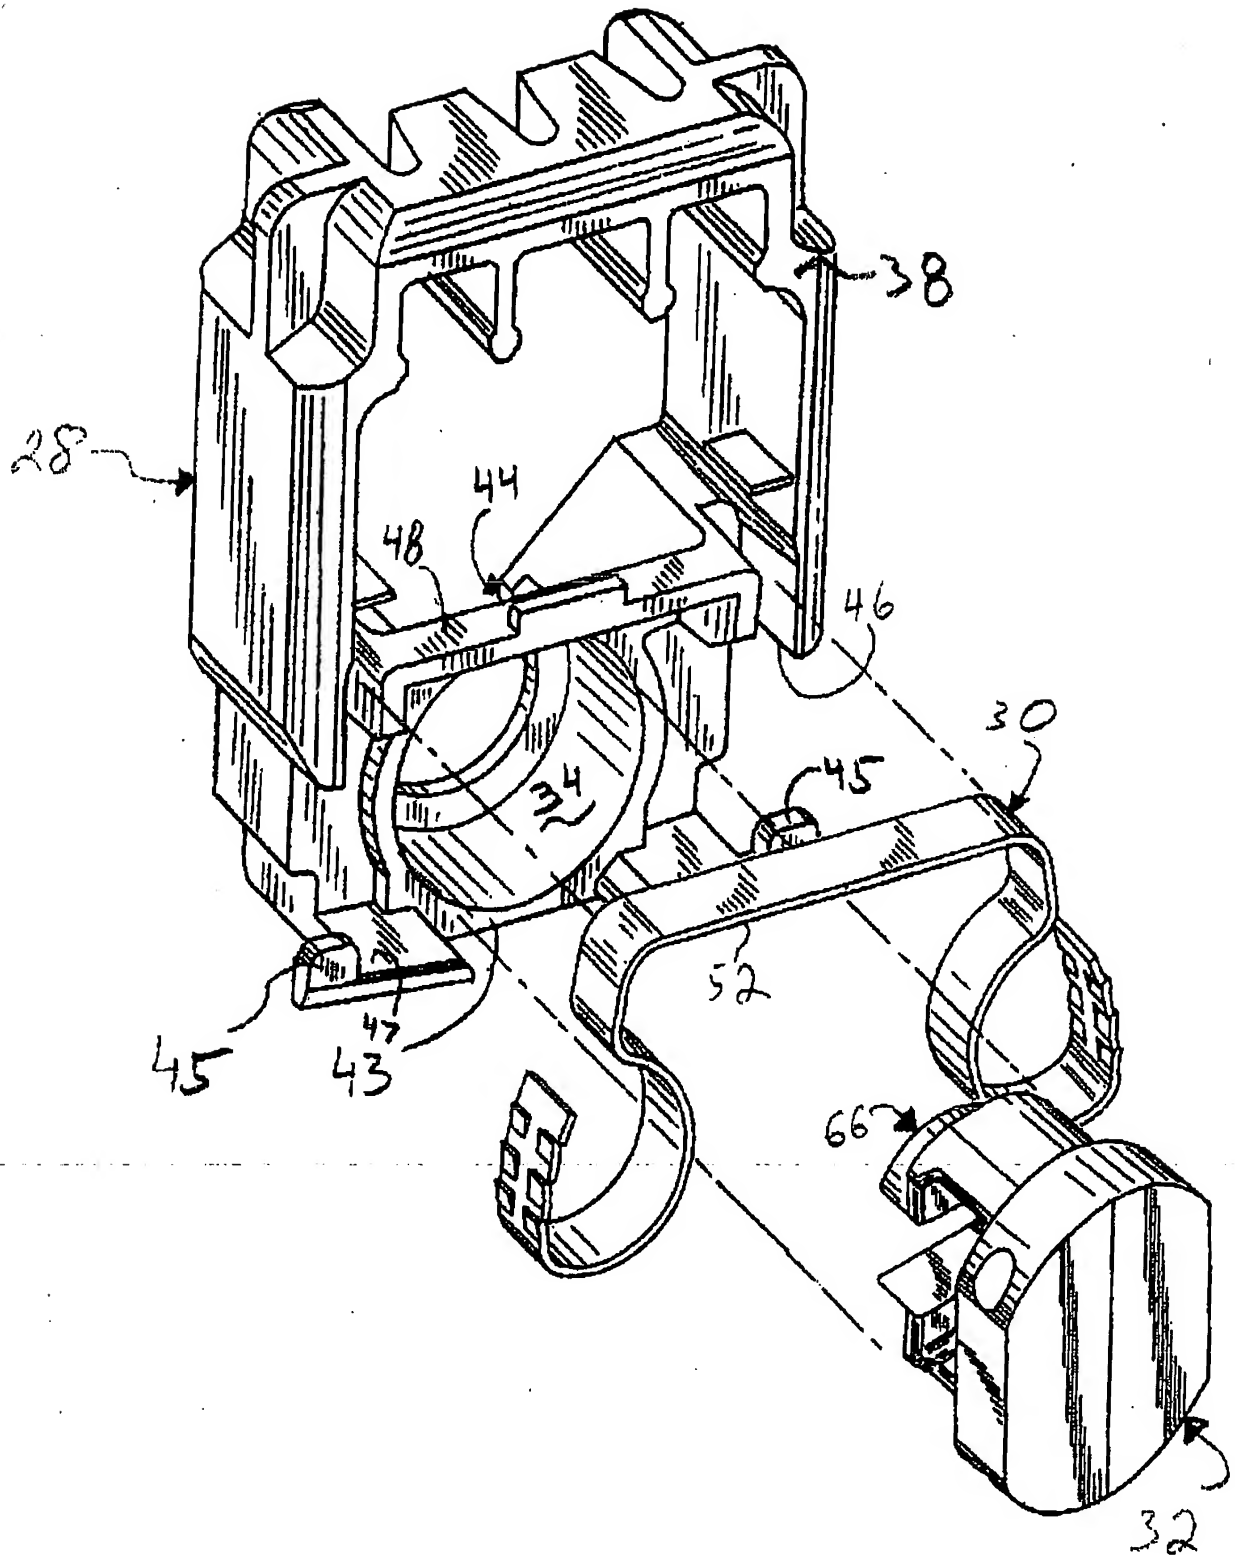

DERWENT-ACC-NO: 2003-617229

DERWENT-WEEK: 200361

COPYRIGHT 2004 DERWENT INFORMATION LTD

TITLE: Brake shoe assembly, has brake unit with spring and rotatable cam positioned in central opening for laterally biasing braking surface through side opening to frictionally engage opposite side walls

INVENTOR: ANNES, J; SOLES, R

PATENT-ASSIGNEE: ASHLAND PROD INC[ASHLN], ANNES J[ANNEI], SOLES R[SOLEI]

PRIORITY-DATA: 2002US-0062302 (February 1, 2002)

PATENT-FAMILY:

PUB-NO	PUB-DATE	LANGUAGE	PAGES	MAIN-IPC
CA 2382790 A1	August 1, 2003	E	000	E05D 015/22
US 20030145523 A1	August 7, 2003	N/A	015	E05D 015/22

APPLICATION-DATA:

PUB-NO	APPL-DESCRIPTOR	APPL-NO	APPL-DATE
CA 2382790A1	N/A	2002CA-2382790	April 22, 2002
US20030145523A1	N/A	2002US-0062302	February 1, 2002

INT-CL (IPC): E05D013/00, E05D015/22, E05F005/00

ABSTRACTED-PUB-NO: US20030145523A

BASIC-ABSTRACT:

NOVELTY - The assembly has a brake unit (30) with a spring having a braking surface is mounted within a slider body (28) such that the surface is adapted for reciprocal lateral movement through a side opening. A rotatable cam (32) is positioned in a central opening (34) of the body to laterally bias the braking surface for movement through the side opening to frictionally engage an opposed side walls.

USE - Used for locking slidable sash window or door within track of frames.

ADVANTAGE - The assembly facilitates to provide serrated braking surfaces and nipple maintaining the cam within the slider body, thereby achieving automatic arresting of the sliding motion of the slider body in a track avoiding damage to the users.

DESCRIPTION OF DRAWING(S) - The drawing shows an exploded perspective view of a brake shoe assembly having a spring brake unit.

Slider body 28

Brake unit 30

Rotatable cam 32

Central opening 34

**CHOSEN-DRAWING: Dwg.2/20**

**TITLE-TERMS: BRAKE SHOE ASSEMBLE BRAKE UNIT SPRING ROTATING CAM POSITION  
CENTRAL OPEN LATERAL BRAKE SURFACE THROUGH SIDE OPEN FRICTION  
ENGAGE OPPOSED SIDE WALL**

**DERWENT-CLASS: Q47**

**SECONDARY-ACC-NO:**

**Non-CPI Secondary Accession Numbers: N2003-491596**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

### **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

---

### **IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**